

CAM-MV6



Universal Multi-View Camera with Six Switchable Viewing Angles

User Manual



EchoMaster.com
EchoMaster is a Power Brand of AAMP Global



15500 Lightwave Drive, Suite 202
Clearwater, Florida 33760
email - support@aampglobal.com (US)
email - technical.eu@aampglobal.com (Europe)



Introduction

Thank you for purchasing your EchoMaster automotive camera.

The following part numbers are supported:

- ▶ CAM-MV6-P
- ▶ CAM-MV6-N

EchoMaster cameras are designed to improve safety during driving by providing high quality images of surrounding areas and obstacles in the vicinity of the vehicle. They will also improve vehicle maneuvering capability by displaying blind spots not normally visible to the driver.

Please ensure you read and understand all aspects of this manual before fitting or using your EchoMaster Camera. Choose a suitable mounting place dependent on the application. Ensure that there are no wiring harnesses or hoses/pipes located behind this panel before drilling.


Key Features

- ▶ 1/3" CMOS Sensor
- ▶ Operates at 0.1 LUX
- ▶ IP67 Rated
- ▶ Self Adhesive
- ▶ 180 Degree Viewing Angle

Box Contents

- ▶ Camera
- ▶ Manual
- ▶ Momentary switch
- ▶ Harness

Dimensions (mm/inches)

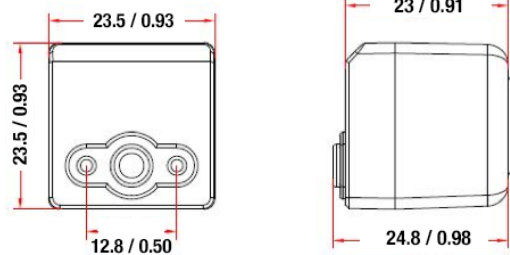

Specifications

	CAM-MV6-P CAM-MV6-N	
Sensor Type	1/3" CMOS	
LEDs	N/A	
Illumination	0.1 LUX	
Viewing Angle	180 degrees	
Mirror Image	YES	
Normal View	YES	
Water/Debris-Proof	IP67	
Audio	NO	
Power Supply	9-16V DC	
Current	<140mA	
Working Temperature	-30°C - +65°C	
Dimensions (mm)	D (24.8) x W (23.5) x H (23.5)	
System	PAL	NTSC
TV Lines	540	540
Resolution	720 x 480	720 x 480

Wiring Diagram & Pin Out

